


MTX SERIES: MULTISTANDARD MULTIMODE DIGITAL & ANALOG TERRESTRIAL TV TRANSMITTER LINE

CONFIGURATION EXAMPLE:

2,5KW UHF ANALOG TV TRANSMITTER (SINGLE DRIVER – SINGLE AMPLIFIER)

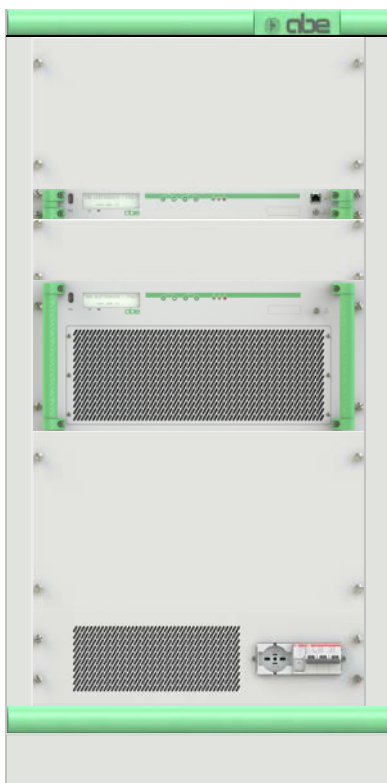

Output filter

MTX – Driving Unit

Power Amplifier 2700W

Mains switch


The "MTX" is a Software Defined Radio Transmitter /Transposer Series easily configurable or re-configurable as analog or digital multistandard unit.

ANALOG - DVB-T/H - DVB-T2 - ISDB-T/Tb - ATSC





MTX A 2K5 /U BLOCK DIAGRAM

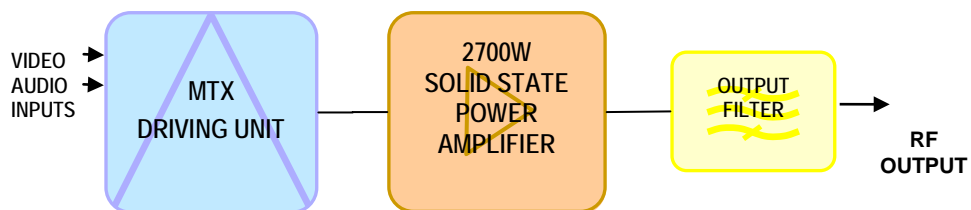

MTX A 2K5 /U Standard specification

GENERAL SPECIFICATIONS

Output frequency range:	UHF 470 to 860MHz in 1Hz steps
Output Power (after filter):	2500W p.s. (tol. +0/-1dB)
Output connector:	Flange 7/8"
Housing:	Rack Cabinet 19" 25U; dimensions: 570 x 1250 x 870 mm (W x H x D)
Power consumption:	<8KVA (typ. 6KVA)
Power supply:	400 Vac \pm 10% 50/60Hz three phases (different power supplies and tolerances available on request)

Notes:

For standard specifications and general description, please refer to "MTX series" brochure. For TV transmitter driver technical specifications please refer to "MTX series – driving unit" brochure.

All specifications contained in this document may be changed without prior notice.