



BroadcastStoreEurope<sup>®</sup>

**TK** Broadcast

## AXON Series

Analog High Efficiency  
FM Stereo Transmitter  
Output Power Ranges  
30W, 50W, 100W, 150W, 300W, 600W, 1200W



AXON Series Exciter/Transmitter is a Family of FM stereo Exciters/Transmitters that guarantees a superior transmission quality and top performances.

Output power from 30 W to 1200W using High Efficiency last LDMOS technology is housed into an ultra-compact cabinet of only 2U height.

is available also in JPN and OIRT frequencies.

AXON can be used as ultra-compact stand alone station, as well as driver in complex high power transmitters and N+1 systems.

For any application AXON is the ultimate solution that meets most demanding customer requirements and guarantees professional features at affordable price.

- HIGH EFFICIENCY LAST GENERATION LDMOS TECHNOLOGY UP TO 80%
- Very LOW SIGNAL TO NOISE MORE THAN 90 DB v
- Very LOW DISTORTION and HIGH STEREO SEPARATION
- TOTAL SPECTRAL PURITY: > -100 DBC SPURIOUS, > - 84 DBC HARMONICS
- SEVEN SELECTABLE COMPLETE SET-UP: READY FOR USE IN 7+1 SYSTEM
- FULL- RANGE POWER SUPPLY: 90-260 VAC MAINS VOLTAGE
- COMPLIANT WITH ALL THE STANDARD: ETSI – CCIR - FCC.
- DIGITAL STEREO CODER: SUPERIOR STEREO QUALITY
- UP TO 75% LDMOS HIGH EFFICIENCY AMPLIFIERS
- EXTERNAL 10MHz and 1PPS SYNCHRONIZATION FOR USE ON SFN APPLICATIONS
- HIGHEST RF SIGNAL QUALITY
- PERFECT AUDIO FIDELITY
- REMOTE CONTROL BY TCP/IP: WEB + SNMP OF ALL SIGNAL PARAMETERS
- CLEAR CRISTAL AUDIO SOUND
- DYNAMIC RDS ENCODER with TMC Function



## TECHNICAL CHARACTERISTICS

### AXON EXCITER/TRANSMITTER 30W TO 1200W

Frequency Range: 87.5 ÷ 108.00 MHz, Programmable in 10 KHz steps  
On request 66 ÷ 74 MHz (OIRT), 76 ÷ 90 MHz (JPN) Bands.  
Frequency Stability: better than ±150Hz from -10 to +50°C  
Max deviation: +/-150kHz.  
Frequency Control: Synthesizer  $\mu$ processor control.  
Power Output: 30W, 50W, 100W, 150W, 300W, 600W, 1200W. Adjustable from 0W to maximum power.  
Output Impedance: 50 ohm.  
Display: forward/reflection power and modulation indicator  
Type of Modulation: Direct frequency modulation of carrier frequency, F3E Stereo with Subcarrier and Mono.  
Lock in Time: Typ. 4 second.  
Off Lock Attenuation:  $\geq$  -80 dBc.  
Modulation Capability: ±150 KHz.  
Modulation Mode: Mono, Stereo, Multiplex, SCA, RDS, Aux.  
Preemphasis: Flat(0)/50/75  $\mu$ s selectable from front panel.  
Asynchronous AM S/N Ratio: -60 dB below reference carrier with 100% AM modulation @ 400 Hz, without FM modulation.  
Synchronous AM S/N Ratio: -60 dB below reference carrier with 100% AM modulation @ 400 Hz with FM modulation ±75 KHz @ 400 Hz.  
RF Harmonics: Exceeds ETSI/EBU/CCIR/FCC requirements. better than 84 dbc  
RF Spurious: Exceeds ETSI/EBU/CCIR/FCC requirements. better than 84 dbc  
Output Connectors: 30W to 600W N type connector, 1200W DIN 7/16 type connector  
Output power on/off and adjustable from front panel and remotely.  
Overall Efficiency up to 80%.  
Monitor RF: -60 dBc, BNC connector  
VSWR: 1.5:1 Maximum with automatic fold-back at higher VSWR

### MONAURAL OPERATION

Audio Input Impedance: 600 ohm balanced, 15 Kohms unbalanced.  
Audio Input Level: -6 to +12 dBm. (Other range on request)  
Input Connector: XLR female.  
Audio Frequency Response:  $\pm$ 0.15 dB, 30 Hz to 15 KHz.  
Total Harmonic Distortion + Noise: 0.03% @ 400 Hz  
Intermodulation Distortion: 0.03%, 1 KHz/1.3 KHz, 1:1 ratio

Transient Intermodulation Distortion: 0.03%, 2.96KHz square wave and 14 KHz sine wave.  
FM S/N Ratio: -89 dB RMS detector, -85 dB below ±75 KHz deviation, 50  $\mu$ s de-emphasis, weighted.

### MULTIPLEX OPERATION

Composite Input Impedance: 5 Kohm unbalanced.  
Composite Input Level: 3.5Vp-p for ±75KHz deviation.  
Input Connector: BNC female.  
Composite Amplitude Response:  $\leq$  ± 0.1dB, from 30Hz to 53kHz  
Total Harmonic Distortion + Noise: 0.03% @ 400 Hz  
Intermodulation Distortion: 0.03%, 1 KHz/1.3 KHz, 1:1 ratio  
Transient Intermodulation Distortion: 0.03%, 2.96 KHz square wave and 14 KHz sine wave.  
FM S/N Ratio: -89 dB RMS detector, -85 dB below ±75 KHz deviation, 50  $\mu$ s de-emphasis, weighted.

### STEREO OPERATION

Audio Input Impedance: 600 ohm balanced, 15 Kohm unbalanced.  
Audio Input Level: -12 to +12 dBm.  
Input Connector: XLR female.  
Audio Frequency Response: ±0.15 dB from 30 Hz to 15 KHz.  
Total Harmonic Distortion + Noise: 0.03% @ 400 Hz  
Intermodulation Distortion: 0.02%, 60Hz /7kHz 4:1 ratio +4dBu  
Transient Intermodulation Distortion: 0.03%, 2.96 KHz square wave and 14 KHz sine wave.  
FM S/N Ratio: -85 dB RMS detector, -82 dB below ±75 KHz deviation, 50  $\mu$ s de-emphasis, weighted.  
Stereo Separation: 30÷80 Hz  $\geq$  -53 dB, 80Hz÷15 KHz  $\geq$  -65 dB (Typ. 70 dB).

Crosstalk attenuation: Main to Sub -55 dB 30 Hz to 15 KHz  
38 KHz Suppression:  $\geq$  -70 dB (typ. -85 dB).  
Pilot Frequency: 19 KHz ± 1 Hz  
Phase Pilot: ± 2° adjustable  
Output Pilot: 1 Vpp., BNC female  
Audio Filter Attenuation:  $\geq$  -55 dB @ 19 KHz, > -45 dB 20 KHz to 100 KHz.  
Modes: Stereo, Mono L+R, Mono L, Mono R.

### AES/EBU OPERATION

Input Level: -10dBfs to 0dBfs  
Input Connector: XLR female, optical TOS-LINK.  
Input Impedance: 110 ohm.  
Data Format: S/PDF, AES/EBU, IEC958, EIAJCP340/1201.  
D/A Converter: 24 bit.  
Sampling Frequency: from 32 to 96 KHz with automatic selection  
Stereo separation (crosstalk):  $\geq$ 50dB, 100Hz to 5kHz  
Amplitude response:  $\leq$  ± 0.1dB, from 30Hz to 15kHz  
FM S/N Ratio: -85 dB below ±75 KHz deviation, 50  $\mu$ s de-emphasis, weighted.



### SCA, RDS, AUX OPERATION

Input Connector: BNC female

Input Impedance: 3 Kohm.

Input Level: -3 to +6 dBm.

Frequency Response:  $\pm 0.2$  dB, 40 KHz to 100 KHz.

Input Connector: BNC female. Most SCA, RDS, AUX, performance parameters are determined primarily by the generator used.

### AUXILIARY CONNECTIONS

USB: connector Type B female front panel.

N°2 RS485: Serial Interface connector RJ45 back panel.

Telemetry Interface: connector DB25F back panel.

External Clock: connector SMA female (optional).

### OPTIONS

External clock: for PLL synchronization purpose 1-2-2.5-5-10 MHz external reference oscillator with self selection of the incoming frequency.

DOUBLE EXCITER WITH AUTOMATIC CHANGEOVER SYSTEM

SNMP TELEMETRY INTERFACE

GSM AND PSTN TELEMETRY

TCP/IP TELEMETRY INTERFACE

SINCH-MODULE FOR SFN APPLICATION

OIRT & JPN VERSION

DIGITAL AUDIO INPUTS

LPFM CODE STATION: FCC IDENTIFICATION CODE

RDS CODER : EASY PROGRAMMABLE BY PC

SCA Encoder

Digital Composite 192kHz Input

### ELECTRICAL (for 10kW to 40kW Transmitter)

AC Input Power: 230/400 VAC  $\pm 15\%$ , 50/60 HZ ( $\pm 3$  HZ) single phase or 3-phase+N

Power factor > 0.99

Cooling: Forced air

MTBF > 20,000 Hours

### ENVIRONMENTAL

Operating temperature: -10°C to +50°C.

Max Operating Altitude: 4000 mt.

Relative Humidity Range: 0 to 95% non condensing.

Protection against Lightning, Dust and Corrosion

### PHYSICAL DIMENSIONS (For typical 10kW Transmitter)

Mounting: 2 unit cabinet

Size: 88mm. (H) x 484mm. (W) x 478mm. (D)

Weight: ~ 11 Kg.




**Front**

- 1. *RS232*: PC CONNECTION
- 2. *STATUS LEDs*: PLL, VSWR, ALARM, STAND-BY
- 3. *CONTROL PANEL*
- 4. *FWD MONITOR*
- 5. *FRONT VENTILATION AIR GRID*

**Rear**

- 6. *REMOTE CONTROL*: WEB/SNMP, PARALLEL A/D
- 7. *AUDIO INPUT*: L&R, MPX, Mono, AES/EBU
- 8. *OUTPUT CONNECTOR*: 7/16 FEMALE
- 9. *INPUT a.c.* : FUSE, GND

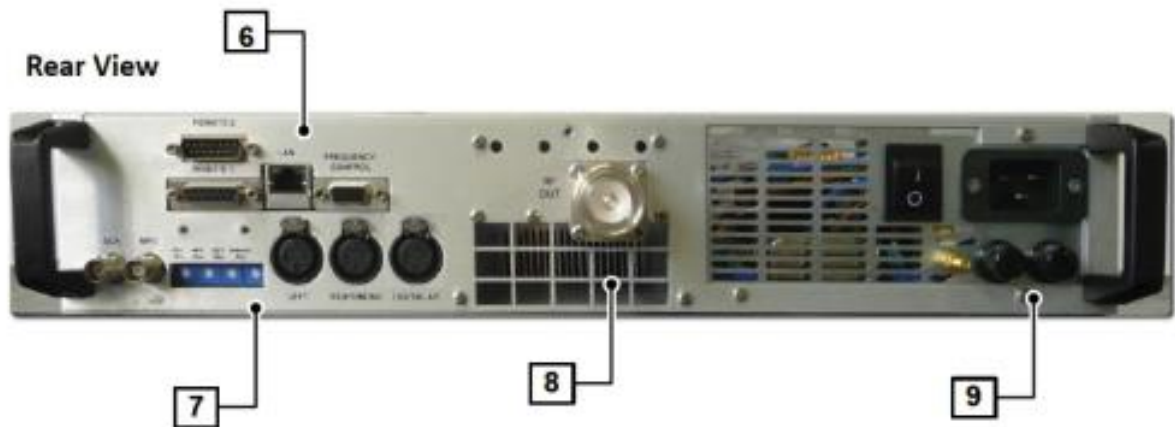

**Internal View**

- 10. *POWER SUPPLY*
- 11. *RF POWER MODULE*
- 12. *MOTHER BOARD*

