

LM7018 18.5" SD/HD/3G Monitor

LM7000 SERIES
SD/HD/3G Monitors



IPS (In-Plane Switching) technology improves viewing angles and colour reproduction, while LED backlight features better uniformity and lowers consumption.



DVI-I and HDMI inputs, included by default, provide direct connection with compatible cameras, multiviewers, PCs and analogue component video signals.



The SD-SDI input is active by default, and the rest of video inputs (composite and HD/3G-SDI), are optional and licence activated.



Audio monitoring is possible thanks to the different input options (analogue and SDI-embedded) and outputs (analogue, digital, headphones and stereo built-in speakers), as well as the configurable 1 dB precision vu-meters.



New tools have been developed to assist in the signal monitoring, such as independent waveforms for Y, Cb and Cr and vectorscope, as well as the "false colour" function.



High resolution dynamic in-monitor displays (IMD) are available on-screen. Additionally, the tally info (on screen or lamp) can be received serially or through contact closure.

18.5" and LED backlight
in only **6RU** high!


MAIN FEATURES

- 1366x768 resolution
- DVI-I and HDMI inputs
- Composite i/o (by menu)
- 2x SD/HD/3G-SDI inputs with active loop
- Composite, SD-SDI and HD/3G-SDI inputs activated by password
- Tri-colour tally
- Waveform and vectorscope
- False colour tool
- In-monitor display
- Audio i/o and VU-meters
- Stereo built-in speakers
- PiP and PbP
- Colorimetry settings
- Remote control

FRONT AND REAR VIEWS



REAR INPUTS

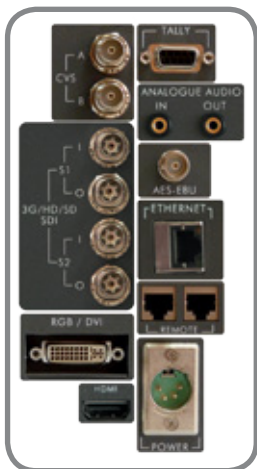

ACCESORIES



SPECIFICATIONS

LCD Panel		
Size		18.5"
Resolution		1366x768 (16:9 native)
Active Area		409.8x230.4mm
Viewing Angle		178° H/V
MTTF		50,000 Hours
Brightness		250 cd/m ²
Contrast		1000:1
Response Time		6 ms
Inputs		
DVI	Connector	DVI-I
	YPbPr	1080i (60/59.95, 50), 576i@50i, 480i@60i
	RGB (VGA)	640x480, 800x600, 1024x768, 1280x1024, 1600x1200
	DVI Graphic mode	640x480 (60/50), 800x600 (60/50), 1024x768 (60/50), 1280x720(60), 1280x1024 (60/50), 1360x768 (60/50), 1366x768 (60/50), 1920x1200 (60/50)
	DVI Video mode	1920x1080(50i, 60i, 50p, 60p)
HDMI	Connector	2xBNC or 1xBNC (selectable by menu)
	SMPTTE-170M	PAL/NTSC/SECAM
SD/HD-SDI/3G	Connector	2xBNC
	SMPTTE-259M	576i@50, 480i@60
	SMPTTE-296M	720p(60/59.94/50)
	SMPTTE-274M	1080p(30/29.97/25/24/23.98), 1080i(60/59.94/50)
	SMPTTE-260M	1035i(60/59.94)
SMPTTE-424M	1080p(60/50)	
Audio	Connector	SDI embedded audio
	SMPTTE-170M	Analogue audio (Jack connector)
In-Monitor display		RJ-45 Connector
Remote control		Ethernet
Tally		SUB-D9 Connector (contact closure and voltage) Connector RJ-45 (serial protocol)
LTC, VITC, VITC2		SDI embedded
Outputs		
Composite		1xBNC (selectable by menu)
SD/HD/3G-SDI		2xBNC (active loop)
Audio	Connector	2x Analogue audio (Jack connector), front and rear
	SMPTTE-170M	AES-EBU (BNC Connector)
Tally	Connector	Speakers(2x2 W)
	SMPTTE-170M	VU-meters
In-Monitor display		On-screen Lamp
Activations		RJ-45 connector
General		
Dimensions		446 x 264 x 106 mm
Weight		5.5 Kg
Power		External PSU 100-240 VAC
Power consumption		40W
Model #		LM7018A11
Accessories	LM7018X80:	rack mounting kit
	MS2300X50:	articulated desktop adaptor
	MS2304X50:	fixed desktop adaptor
Activations	LM7000X07:	composite video inputs
	LM7005X08:	HD/3G option